


Application 適用車型

SUZUKI IGNIS '17 -

Components 內含配件

- ① Brace-Middle 結構桿-中間桿.....1pcs
- ② Brace-RH/LH 結構桿-左/右.....2pcs
- ③ Retainer nut 螺帽鎖片.....2pcs
- ④ Bolt 螺絲 (M10x1.25x25)2pcs
- ⑤ Washer 華司 (20.8x10.7x2).....2pcs

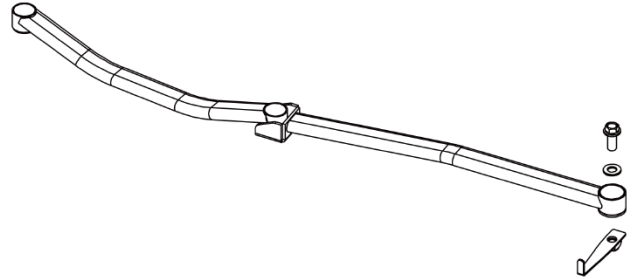


Caution 注意事項

- Installation is recommended to be performed by licensed mechanics with necessary tools to ensure safety. Incorrect installation may cause injury, damage to the product or vehicle. 安裝建議由合格的技師及工具執行以確保安全。安裝錯誤可能對人員、產品及車輛造成傷害。
- Note the routing of wires and cables before installation, or please refer to factory manual. 安裝前請事先記下線路的安裝路徑及位置以維持原廠配置。有疑問時請參考原廠手冊。
- Tighten bolts and nuts firmly by using handtools, and with specified torque if mentioned. 安裝過程請使用手動工具確實鎖緊螺帽及螺絲。如有特別註明請依照說明指示的扭力上鎖。

Instructions 安裝說明


1. Raise and safely support the vehicle.
將車輛升起。

2. Remove factory exhaust tunnel reinforcement brace.
將原廠排氣管通道的補強鐵件拆下。

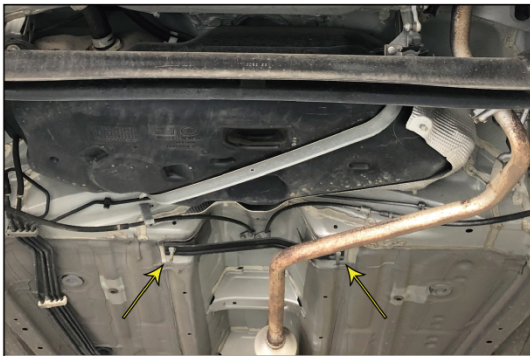

3. Insert supplied retainer nuts into the frame rail holes on both sides.
將附件螺帽鎖片置入兩側底盤大樑的孔中。

4. Install the RH/LH side brace onto the vehicle.
將左/右側結構桿安裝於車輛上。

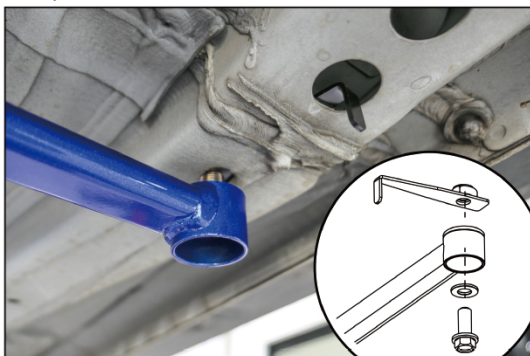

5. Install supplied M10 bolts and washers to the retainer nuts to secure the RH/LH braces.
將附件M10螺絲及華司鎖至螺帽片，以固定左/右桿身。

6. Place middle brace onto the inner bracket of LH/RH braces.
將中間桿安裝於左/右結構桿內側鎖點上。

7. Reinstall the factory nuts to secure the braces.
將原廠螺帽重新鎖上以固定結構桿。



Illustration of installed state
安裝完成示意圖